

Type: CE = Single Inlet


Performance / Dimensions



Type: CE 570/E 15 [220V 1N~ 60 Hz]

MP Capacitor 12 μ F - 400 VDB
Protection type: IP 65

Please state intake side !
For sound data please see extra pages.

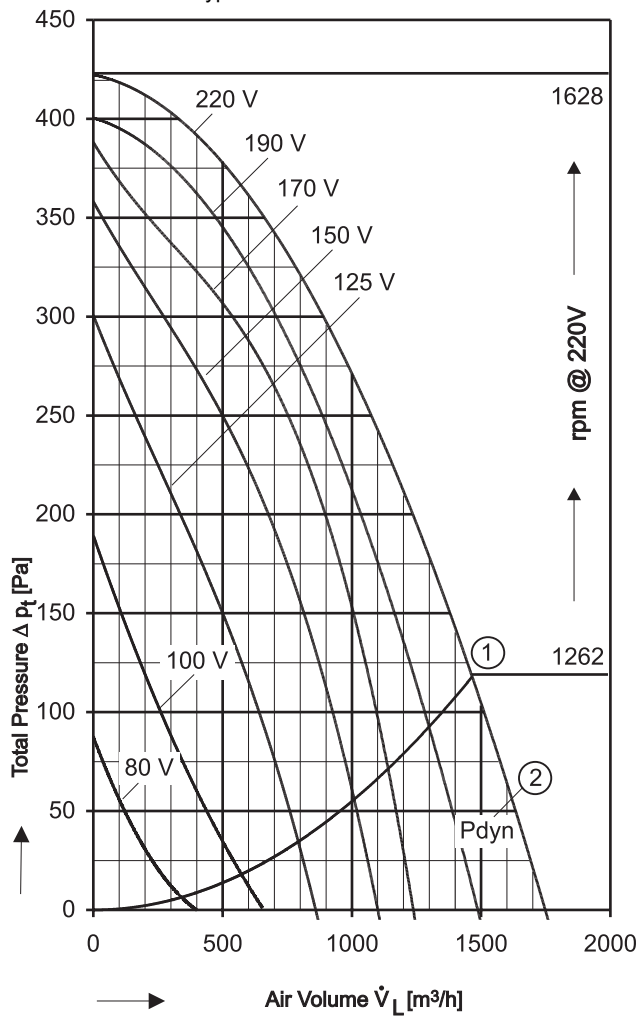


Voltage [V]	Air Volume \dot{V}_L [m³/h] at $\rho = 1,2 \text{ kg/m}^3$ and current [A] (bold figures)							
	Free Air	Total Pressure Δp_t [Pa]						
		60	90	120	150	180	210	240
80	340 0,89							
100	575 1,22	440 1,11	260 1,08					
125	790 1,41	760 1,40	640 1,38	500 1,35	335 1,30			
150	1010 1,67		985 1,66	885 1,63	765 1,58	610 1,53	415 1,45	
170	1140 1,86		1095 1,83	1005 1,79	895 1,74	755 1,67	540 1,58	
190	1300 2,03		1280 2,02	1165 1,96	1035 1,89	885 1,81	710 1,72	475 1,61
220	1465 2,21			1380 2,17	1235 2,08	1075 2,00	890 1,90	660 1,78

**Save power and even more silent
FISCHBACH SPEED CONTROLLERS
Manual and Automatic**


Voltage Control	Type*	Order-No.*
Stepless 0 - 100% and 100% - 0	FDR 32	6162
Stepwise 7 Steps	FDR 420	6201
FISCHBACH AUTOMATIC CONTROL **	FRA 32	6251

* For further details see resp. catalogue pages
** For details of sensors etc., on request

- ① Free air relating to fan discharge area 0,0285 m². Max. permissible ambient temperature 60°C.
- ② Velocity (dynamic) pressure
For Static Pressure Regain see example

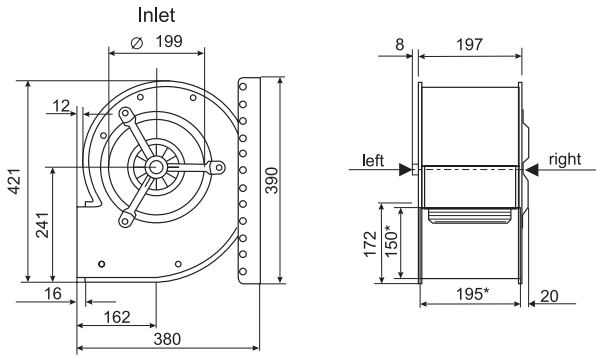

* External dimension of discharge



The Silent One