

FISCHBACH

Luft- und Ventilatorentechnik GmbH


Setpoint adjuster 0-10V type: HF10F IP66 with LED toggle switch 0-I and LED indicator light
0-I and LED indicator light Item-No. 18069433



Fischbach setpoint adjuster HF10F IP66 with blue LED toggle switch 0-I and additional yellow LED indicator light contains a 10 kOhm potentiometer for controlling devices with 10V output or 0-10 V control input, as well as an additional switching contact for valves etc. Robust, impact-resistant surface-mounted housing, protection class IP66.


Technical information:

- Rated insulation voltage U_i : 250 VAC
- Rated impuls withstand voltage U_{imp} : 4kV
- 10k Ω
- Monoblock housing with measurement scale 1 rotation
- Mounting in any position possible
- Control: linear
- Resistance tolerance: $\pm 10\%$

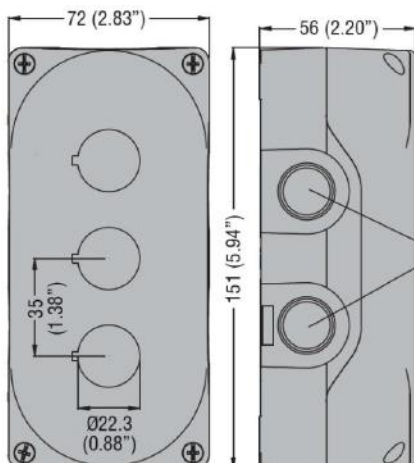

Knockout for M20/PG13.5 (two/side)

Wiring diagram:

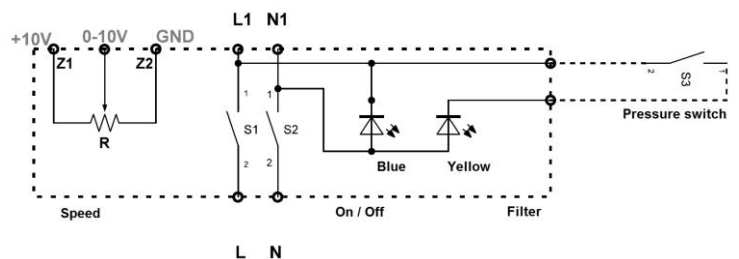

Knockout for M20/M25/PG13.5/PG16 (on top and bottom)